


Via Primo Levi 6 MONTICHIARI (BS) Tel. +39030/9654811 (3 linee r.a.) Fax +39030/961294 - +39030/9654833 e-mail: tecnico@pezzaioli.it

TRAILER BBA32

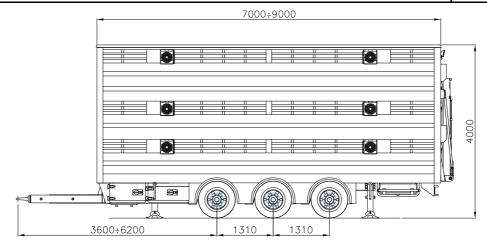

MODEL	GROSS WEIGHT (Kg)	LENGTH (m)	TARE +/- 3% (Kg)		
			2 Decks	3 Decks	4 Decks
BBA32E	27000	7.10	7100	7600	8000
BBA32F	27000	7.60	7250	7800	8250
BBA32G	27000	8.10	7400	8000	8500

TECHNICHAL CHARACTERISTICS

- Ø Chassis: Self-supporting anti-corrosion Aluminium structure
- Ø Axles: twin 10000 Kg capacity.
- Ø Brakes: disk Ø 370 mm.
- Ø Braking system: pneumatic with 2 lines according to ECE regulations with 4 channel EBS and RSS.
- Ø Parking Brakes: spring brakes with pneumatic controls.
- Ø Suspensions: pneumatic type with electronic control and integrated with front and rear stabilization bar.
- Ø Wheels: disc 19.5 x 7.50 and M spigot.
- Ø Tyres: 265/70R19.5 or 255/60R19.5 twin.
- Ø Tow bar: extensible type 3x80 mm.
- **Body:** box unit for livestock 2, 3, or 4 loading decks with hydraulic controls, raising lowering roof, side doors and back doors, wide tool boxes under the body, internal and external working lights.
- **Electrohydraulic system:** completed with automatic safety device in accordance with Machines Directive and Work Safety Institute. (approval TUV n° 24 03 9761 002)
- **Ø** Loading ramp: with hydraulic movement, anti-slip, with incorporated side guards and to work as barn doors if necessary
- Ø Partition gates: in aluminium or zinc coated steel with over-flap for larger animals.
- Ø Roof: insulated type

OPTIONALS

- Ø Vents on sided to be closed with aluminium flaps (+300 Kg);
- Ø Automatic drinking system with water tank (+250 Kg);
- Ø Heating system for drinking system
- Ø Positioning GPS system integrated with temperature and opening doors recording.